

BVV™ SHORT SIGHT GLASS

WWW.SHOPBVV.COM | SUPPORT@SHOPBVV.COM

Material(s):	304 Stainless Steel (flanges/hardware) Borosilicate (glass) BUNA-N (seals)
Specifications Met:	ASME B1.20.1, ISO 8434, and SAE J514
Maximum Pressure:	Varies by size
Temperature Range:	-20° - 100°C
Maximum Vacuum	29 in. of Hg @ 20°C
Country of Origin	China
Connection Type	Tri-Clamp
Note:	Chemical compatibility must be determined by the customer based on the conditions in which the product is being used, including the presence of other chemicals, temperature, and consistency.





FITTING SPECIFICATIONS

Part No.	Nominal Flange Size	Max Pressure (PSI)	Dimensions (in)	
			L	MAX OD
SSG150	1.5"	100	3.75	3.25
SSG200	2"	100	3.75	4
SSG300	3"	100	4.375	5
SSG400	4"	100	4.5	6.5
SSG600	6"	100	4.125	8
SSG800	8"	100	5.625	10.5
SSG1000*	10"	50	8.125	13
SSG1200*	12"	50	8.125	15.5

* Comes Standard With Cage

BVV™ SHORT SIGHT GLASS

WWW.SHOPBVV.COM | SUPPORT@SHOPBVV.COM

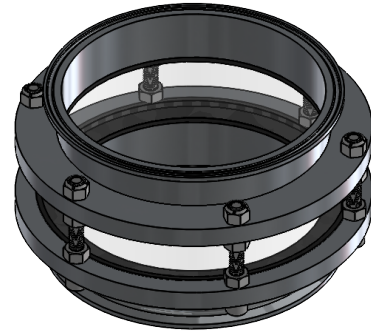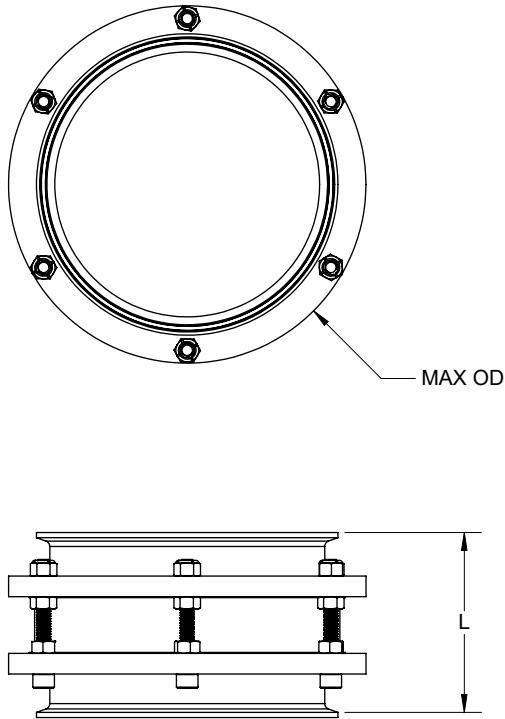

TITLE: SSGXXX		MATERIAL:		NAME	TOLERANCES UNLESS OTHERWISE SPECIFIED	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BEST VALUE VACS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BEST VALUE VACS IS PROHIBITED.
		FINISH: N/A	DRAWN	MO		
DATE: 10/20/2023	REVISION: 00	UNITS: INCH	CHECKED	DECIMALS IN MM X +/- .1 +/- .8 XX +/- .01 +/- .25 XXX +/- .00 ANGULAR +/- 1° +/- 1°		
SHEET:1 OF 1	SHEET SIZE: A	SCALE: 1:3	ENG APPR.			

