


BVV™ FNPT STAINLESS STEEL SIGHT GLASS

WWW.SHOPBVV.COM | SUPPORT@SHOPBVV.COM

Material:	304 Stainless Steel
Maximum Pressure:	SSG04: 150 psi @ 70°F SSG06: 150 psi @ 70°F SSG08: 100 psi @ 70°F SSG12: 100 psi @ 70°F
Temperature Range:	-60° - 180°F
Maximum Vacuum	29 in. of Hg @ 72°F
Country of Origin	China
Use With:	Butane, Propane, DME, Ethanol, Glycol, Air, Hydraulic Fluid, Natural Gas, Phosphoric Acid, and Water
Note:	Chemical compatibility must be determined by the customer based on the conditions in which the product is being used, including the presence of other chemicals, temperature, and consistency.
Manufacturer Certification	ISO 9001:2015
Window Material	Annealed Glass
Seal Material	Viton

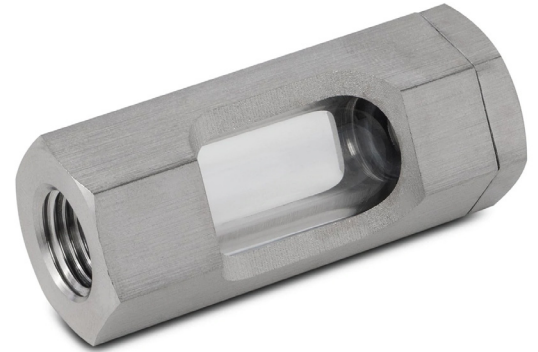


FITTING SPECIFICATIONS

	Thread Size (in)	Dimensions (in)				
Part No.	T1	L1	L	S1	S2	D1
SSSG04	1/4 " X18 NPT	1.000	2.187	0.875	0.100	0.450
SSSG06	3/8 " X18 NPT	1.125	2.250	1.000	0.47	0.51
SSSG08	1/2 " X14 NPT	1.187	2.500	1.250	0.155	0.656
SSSG16	1 " X11.5 NPT	1.250	2.875	2.000	0.200	1.158

BVV™ FNPT STAINLESS STEEL SIGHT GLASS

WWW.SHOPBVV.COM | SUPPORT@SHOPBVV.COM

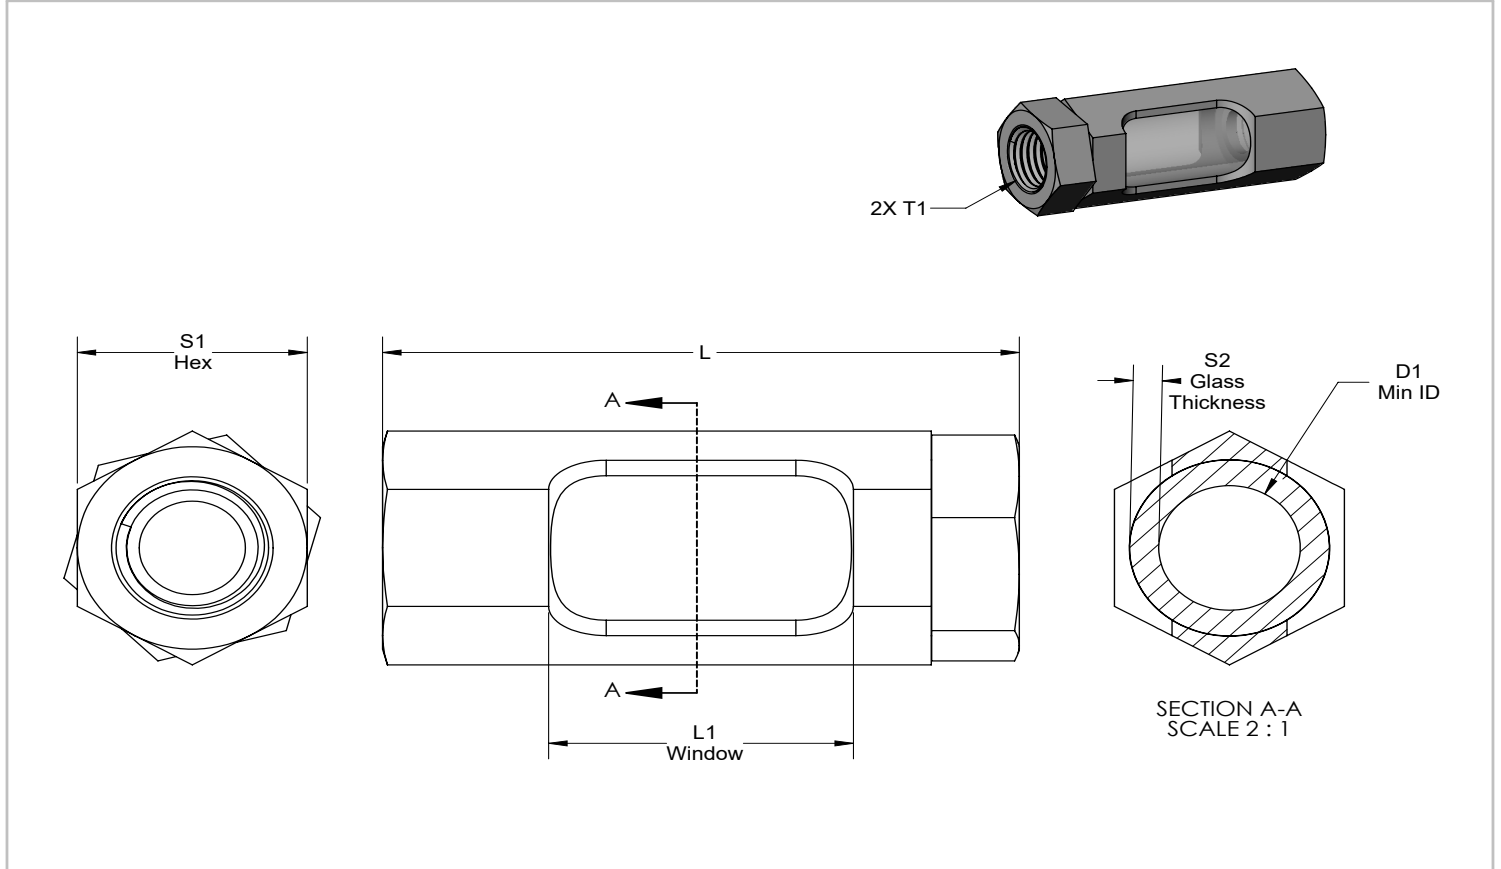

TITLE: SSSG		MATERIAL: 304 SS		NAME	TOLERANCES UNLESS OTHERWISE SPECIFIED THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BEST VALUE VACS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BEST VALUE VACS IS PROHIBITED.
		FINISH: N/A	DRAWN	JB	
DATE: 4/11/2022	REVISION: 00	UNITS: IN	CHECKED		
SHEET:1 OF 1	SHEET SIZE: A	SCALE: 2:1	ENG APPR.		